



GIANTMIX MZR

MZR3 110-400

MZR4 150-400

MZR5 185-400

Application

Long-axis agitator for ring- and slalom channels up to 2 m depth

Technical Data

Tube length 4.0 / 4.5 / 5.0 / 5.5 / 6.0 m
 Agitator shaft \varnothing 100 x 3 mm, with 6.0 m \varnothing 101.6 x 4.0 mm galvanized
 PTO with protective guard for the alternative use with tractor
 Optional guide rail with rear upstand for an easier installation of the Giantmix
 Optional oil inspection glass for monitoring the tightness
 Agitator completely manufactured in modular design
 Optional with guide rail for easy installation of the Giantmix

Motor

11 / 15 / 18.5 kW (IE3-motors)
 400 V, 50 Hz, 1,470 rpm
 PTC thermistors as overheat protection

Gear

Spur gear drive, helical teeth, low noise level
 Reduction ratio $i = 3.69$
 Oil chamber, gear oil SAE 85W-140 / API GL-5
 Oil change after 2,000 operating hours

Bearing

2 tapered roller bearings to absorb the axial forces
 Shaft seal ring, optional: mechanical seal of SiC/SiC
 Drive shaft \varnothing 50 mm with multiple interim bearing and with both sided slip-on connection

Propeller

3-blade high efficiency propeller, dynamically balanced

MZR3	11.0 kW	propeller HD 580	400 rpm
MZR4	15.0 kW	propeller MS 580	400 rpm
MZR5	18.5 kW	propeller ES 580	400 rpm

Galvanized, hardened steel, ss304 or hardened ss304

Control switch (optional)

Soft start or Star-delta switch
 (MZR5 only possible with soft start)
 Delivery without connection cable



تلفن تماس : ۸ و ۸۸۳۲۴۹۳۷ - ۰۲۱


E-mail : sales@brp.co.ir

GIANTMIX MZR

MZR3 110-400

MZR4 150-400

MZR5 185-400

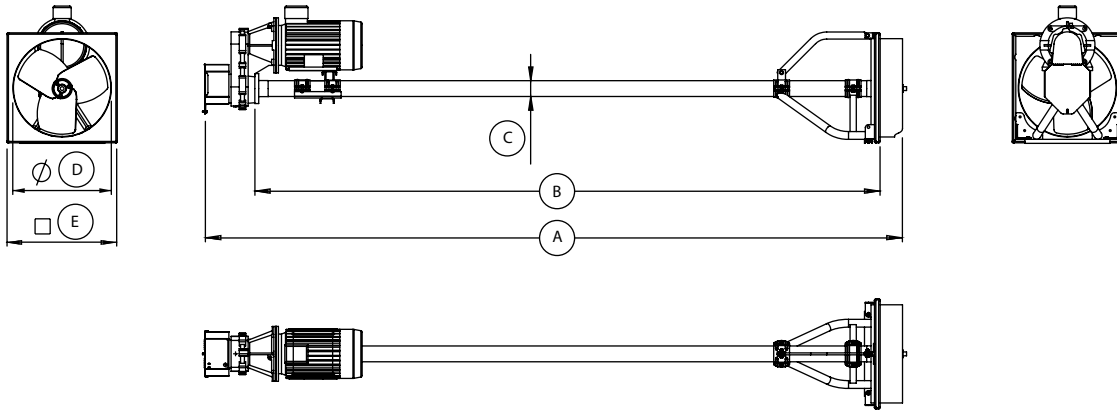

Dimensions

Type	A [m]	B [m]	C [mm]	D [mm]	E [mm]
MZR 3	4.5 / 5.0 / 5.5 / 6.0 / 6.5	4.0 / 4.5 / 5.0 / 5.5 / 6.0	100	600 / 620	620x620 / 700x700
MZR 4	4.5 / 5.0 / 5.5 / 6.0 / 6.5	4.0 / 4.5 / 5.0 / 5.5 / 6.0	100	600 / 620	620x620 / 700x700
MZR 5	4.5 / 5.0 / 5.5 / 6.0 / 6.5	4.0 / 4.5 / 5.0 / 5.5 / 6.0	100	600 / 620	620x620 / 700x700

Technical data

Type	Rated Power [kW]	Rated Voltage [V]	Rated Current [A]	Frequency [Hz]	Power factor cos ϕ	Gear reduction ratio	Propeller speed [rpm]	Propeller diameter [mm]	Axial force [kN]	Flow velocity [m/s] *	Pumping rate Water [m ³ /min]	Weight approximate [kg]
MZR 3	11	400	19.6	50	0.88	3.69	400	580	2.2	3.5	52	330
MZR 4	15	400	28.3	50	0.83	3.69	400	580	3.0	3.6	53	330
MZR 5	18.5	400	33.7	50	0.85	3.69	400	580	3.3	4.0	59	330

Subject to technical changes

* measured in water and 1.2 m distance



بیس‌تارین پارس

نماینده‌گی ایران

تلفن تماس: ۸ و ۰۲۱ - ۸۸۲۴۹۲۷

E-mail: sales@brp.co.ir

IA Rührtechnik GmbH | Martinszeller Str. 21 | DE-87477 Sulzberg
 I9 8376 / 92131 - 0 | Fax: - 19 | info@suma.de | www.suma.de/en

As per: 2022-07