



OPTIMIX

2G 55-75

2G 90-75



Application

Submersible motor
Dry matter content up to 12 %
Substrate temperature up to 55°C
pH-value 6.5 - 8.2

Motor

Power: 5.5 / 9.0 kW
400 V, 50 Hz, other voltages on request
Protection class IP 68, up to 10 m submergence
PTC thermistors for thermal protection
High efficiency
Own oil circulation, turbine oil

Gear / Bearing

Robust, two stage planetary gear
Reduction ration $i = 19.6$
Mechanical seal SiC/SiC
2 tapered-roller bearings to absorb the axial forces
Hardened steel spline shaft, $\varnothing 50$ mm
Separate oil fill with long life gear oil
Oil change interval 12,000 operation hours

Ex-zone

Authorized for Ex-Zone 2
ATEX Classification $\text{CE} \text{ II 3G Ex ec h IIA T3 Gc}$



بیمادارین پارس

نمایندگی ایران

تلفن تماس: ۸ و ۸۸۳۲۴۹۳۷ - ۲۱

E-mail: sales@brp.co.ir

Propeller

3-blade high efficiency propeller, dynamically balanced

Optimix 2G 55-75	5.5 kW	LT 1400-G6	75 rpm
Optimix 2G 90-75	9.0 kW	LT 1400	75 rpm

Painted or hardened steel

Guide mast connection

Guide mast support with 4 rollers for smooth height adjustment

Depending version, available for 100 / 120 / 150 mm square mast

Special sizes on request

Corrosion protection

Ductile cast iron housing (GGG40)

Agitator has an two component epoxy coating

Agitator is galvanically isolated from the guide mast

Cable

Pressed-on cable gland

Standard length 10 m

Cable $7 \times 4 + 4 \times 1.5 \text{ mm}^2$, $\varnothing 20$ mm


Microbe resistant

Strain relief 800 N

Control box (optional)

Soft start or frequency converter

OPTIMIX
2G 55-75
2G 90-75

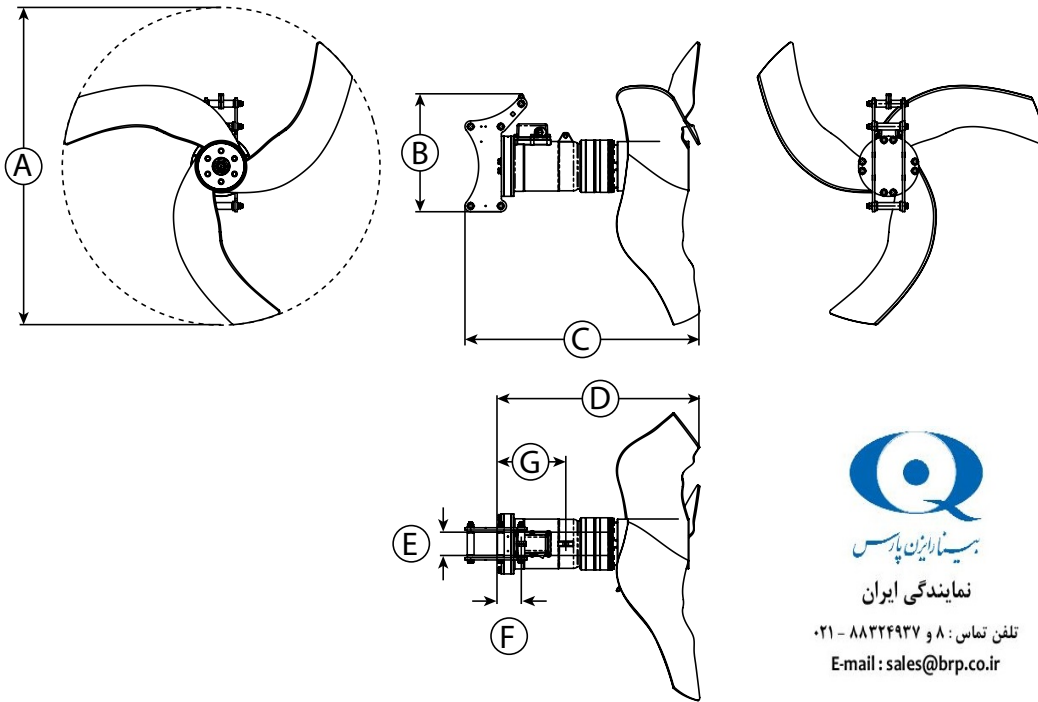

Dimensions / Weight

Type	A [∅ in mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	Weight approx. [kg]			
2G 55-75	1,400	520	1,200	1,000	100 / 120 / 150	105	300	200			
2G 90-75											

Technical data

Type	Rated Power [kW]	Rated Voltage [V]	Full load current [A]	Frequency [Hz]	Power factor cos φ	Gear reduction ratio	Propeller speed [rpm]	Propeller diameter [mm]	Axial force [kN]	Flow velocity [m/s] *	Pumping rate [m ³ /min]	Pumping rate [m ³ /h]
2G 55-75	5.5	400	10.7	50	0.83	19.6	75	1,400	2.6	2.0	180	10.810
2G 90-75	9.0	400	17.7	50	0.83	19.6	75	1,400	2.9	1.8	162	9.730

Subject to technical changes

* measured in water and 1.2 m distance