




OPTIMIX

2A 90-280

2A 90-380

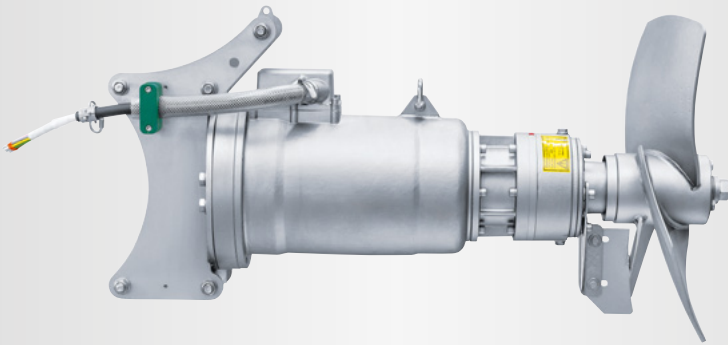

Application

Submersible motor
Dry matter content up to 12 %
Substrate temperature up to 55°C
pH-value 5.5 - 8.2 / optional ss316 pH-value 4.5-8.2

Motor

Power: 9.0 kW
400 V, 50 Hz, special tension on request
Protection class IP 68, up to 10 m submergence
PTC thermistors in as overheat protection
Own oil circulation, turbine oil

Gear

Robust planetary gear,
Reduction ratio $i = 3.83 / 5.25$
Own oil circulation, Longlife gear oil
Change oil after 10,000 operating hours

Bearing

Bearing flange with mechanical seal of SiC/SiC
2 tapered roller bearings to absorb the axial forces
Drive head with separat oil chamber
Longlife Gear oil
Accessory: POM protection to minimize abrasion

Ex-Zone

Authorized for Ex-Zone 2
ATEX Classification $\text{CE} \text{ II 3G Ex ec h IIA T3 Gc}$

Propeller

3-blade high efficiency propeller, dynamically balanced

Optimix 2A	9.0 kW	propeller HD+750	280 rpm
Optimix 2A	9.0 kW	propeller HD+580	380 rpm

ss304, ss304 hardened or ss316

Guiding unit

Guide mast support with 4 rollers for smooth height adjustment:
for 9 kW: 100 / 120 mm square mast
Special sizes on request

Corrosion protection

Guiding unit in ss304
Optional completely in ss316

Cable

Pressed-on cable gland
Cable $7 \times 4 + 4 \times 1.0 \text{ mm}^2$, $\varnothing 20 \text{ mm}$, shielded
Microbe resistant
Strain relief 800 N

Control box

Star-delta switch, soft start or frequency converter



نمایندگی ایران

تلفن تماس: ۸ و ۸۸۳۲۴۹۳۷ - ۰۲۱

E-mail : sales@brp.co.ir

OPTIMIX

2A 90-280

2A 90-380




بیسارازین پارس

نماینده گی ایران

تلفن تماس : ۸ و ۸۸۳۲۴۹۳۷ - ۰۲۱

E-mail : sales@brp.co.ir

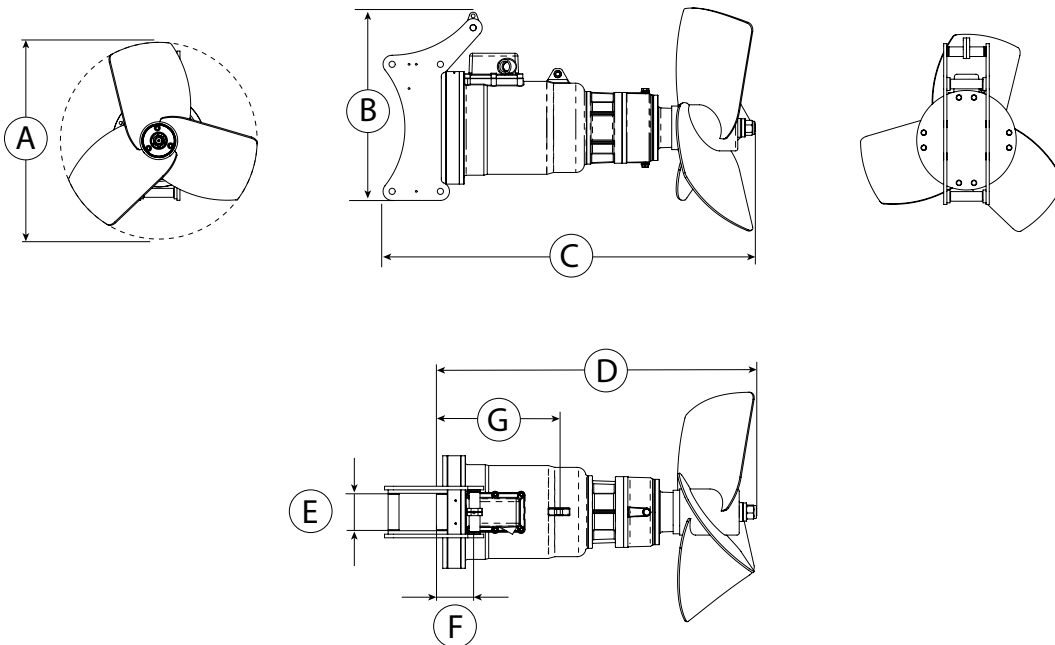

Dimensions / Weight

Type	A [mm]	B [mm]	C max [mm]	D [mm]	E [mm]	F [mm]	G [mm]	Weight approx. [kg]			
2A 90-280	750	520	1,085	885	100 / 120	105	300	170			
2A 90-380	580	520	1,050	850	100 / 120	105	300	170			

Technical data

Type	Rated Power [kW]	Rated Voltage [V]	Full load current [A]	Frequency [Hz]	Power factor cos ϕ	Gear reduction ratio	Propeller speed [rpm]	Propeller diameter [mm]	Axial force [kN]	Flow velocity [m/s] *	Pumping rate [m ³ /min]	Pumping rate [m ³ /h]
2A 90-280	9.0	400	17.7	50	0.83	5.25	280	750	2.4	2.9	75	4,480
2A 90-380	9.0	400	17.7	50	0.83	3.83	380	580	1.9	3.4	51	3,080

Subject to technical changes

* measured in water and 1.2 m distance